

Mobile screw conveyor

Diameter 100 to 150 mm

The mobile solution if you need to react flexibly.



Your benefits:

- Flexibly, fast and location-independent using
- Easy handling
- High flow rate
- Quick and easy height adjustment up to 60 °
- Inlet hopper with protective grill and flow control
- Driving station with v-belt drive
- Galvanized construction for long life
- Also available in stainless steel
- Many options available

Options:

- Outlet with folding joint (can also be used when folded)
- Swivel castors
- Extension funnel with cover
- Intermediate bearing

On request, you can get more variations individually adapted to your needs.



Inlet hopper with flow control and rollers



Option: folding joint incl. intermediate bearing



Option: swivel castors under inlet hopper

• Agricultural technology

• Plant construction


• Engineering

Unnerweg 84
D- 49688 Lastrup
Tel.: +49 (0) 4472 940090
Fax.: +49 (0) 4472 940090
E-Mail: kessens@kessens-technik.de

- Agricultural technology

- Plant construction

- Engineering

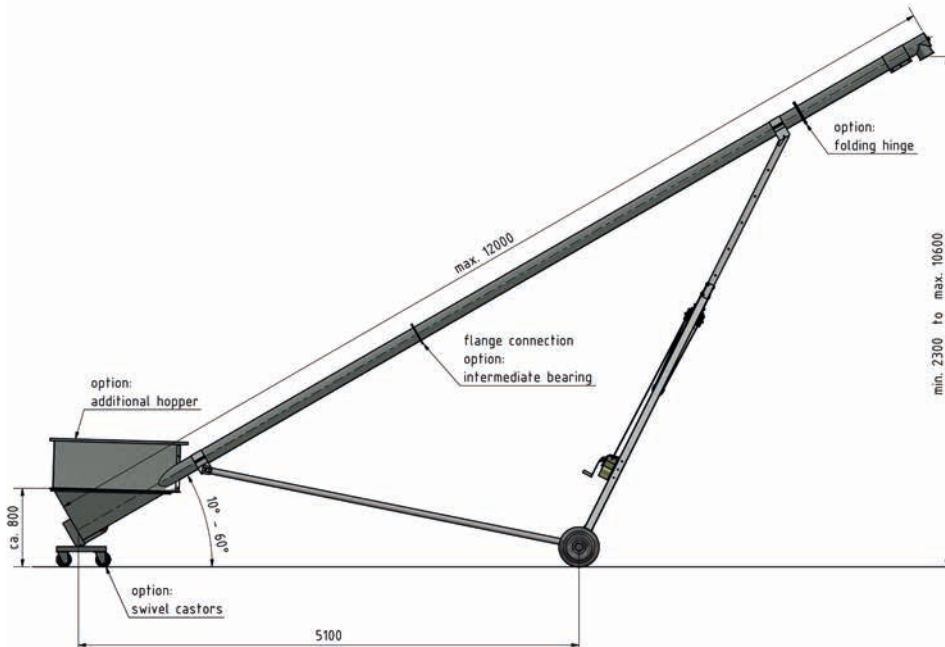

Conveying capacity in t / h

inclination	Ø 100 mm	Ø 150 mm
30°	8 - 10	20 - 30
60°	5 - 8	15 - 20

Grain (wheat 15 %, 0.75 t/m³) depending on degree of filling and purity of product



Unnerweg 84
D- 49688 Lastrup
Tel.: +49 (0) 4472 940090
Fax.: +49 (0) 4472 940090
E-Mail: kessens@kessens-technik.de