

Mobile screw conveyor Diameter 100 to 150 mm

The mobile solution if you need to react flexibly.



Your benefits:

- Flexibly, fast and location-independent using
- Easy handling
- High flow rate
- Quick and easy height adjustment
- Inlet hopper with protective grill and flow control
- Driving station with v-belt drive
- Galvanized construction for long life

Options:

- Outlet with folding joint (can also be used when folded)
- Swivel castors
- Extension funnel with cover
- Intermediate bearing
- Made of stainless steel

On request, you can get more variations individually adapted to your needs.



Inlet hopper with flow control and rollers



Option: folding joint incl. intermediate bearing




Option: swivel castors under inlet hopper

• Agricultural technology

• Plant construction

• Engineering

Unnerweg 84
D- 49688 Lastrup
Tel.: +49 (0) 4472 940090
Fax.: +49 (0) 4472 940090
E-Mail: kessens@kessens-technik.de

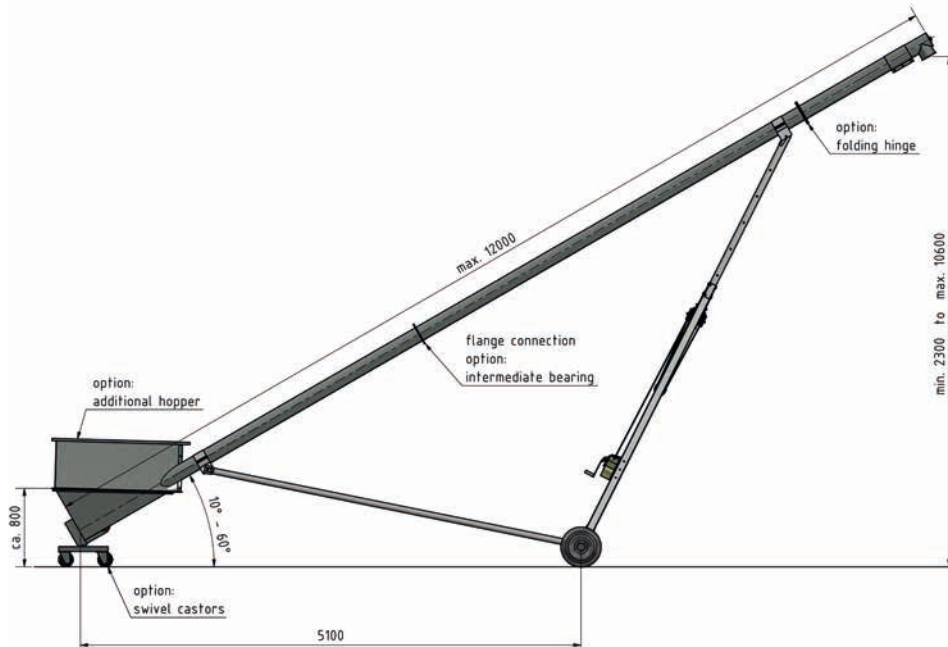

Conveying capacity in t / h

inclination	Ø 100 mm	Ø 150 mm
30°	8 - 10	20 - 30
60°	5 - 8	15 - 20

Performance with a bulk weight of 750 kg / tm³ and a grain moisture of approx. 15%. Depending on the filling level and purity of the product



- Agricultural technology

- Plant construction

- Engineering

Unnerweg 84
D- 49688 Lastrup
Tel.: +49 (0) 4472 940090
Fax.: +49 (0) 4472 940090
E-Mail: kessens@kessens-technik.de